

→ Reverse osmosis

# RO LYKKE

(Ref.910527)

Direct Flow system

## DESCRIPTION

5-stage equipment  
Installation kit  
Intelligent faucet with status messages  
High-performance membrane with self-flushing  
Integrated hydraulic circuit  
Easy maintenance

## SPECIFICATIONS

WEIGHT	12,5 kg
FLOW	1,6-2,1 lpm
TEMPERATURE (max. - min.)	38 °C - 5 °C
INLET TDS (max.)	1500 ppm
PRESSURE (max. - mmn.)	4 - 1 bares (400kPa - 100kPa)
MEMBRANE	600 GPD
FAUCET	Smart faucet
PUMP	Booster
POWER SUPPLY	24VDC / 36VDC
EXTERNAL ADAPTER	230VAC 50/60 Hz



QUALITY  
CONTROL



DOUBLE  
FLOW



FILTER  
CONTROL



CAPSULATED  
MEMBRANE



FLUSHING  
READY



PRESSURE  
PUMP



LED  
STATUS


## ORIGINAL CONSUMABLES

Combined pre-filter pp 5 µm+charcoal GAC (Ref. 910540)

Membrane RO 600 GPD ( Ref. 910541)



**WATER QUALITY  
WARNING**

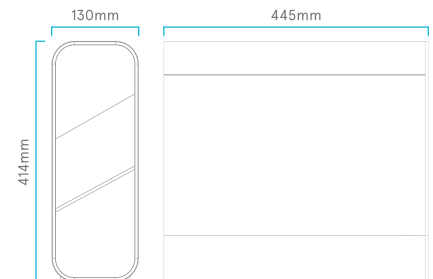

WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC  
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as designing and teaching of non-official training courses related with its technology are certified and comply with the UNE-ISO-9001 far WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEOF18000008U6 and 13/02/2018 as a date of entry of the authorization.